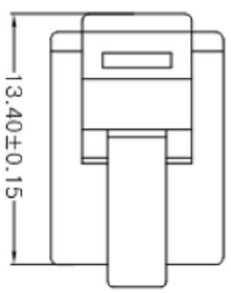
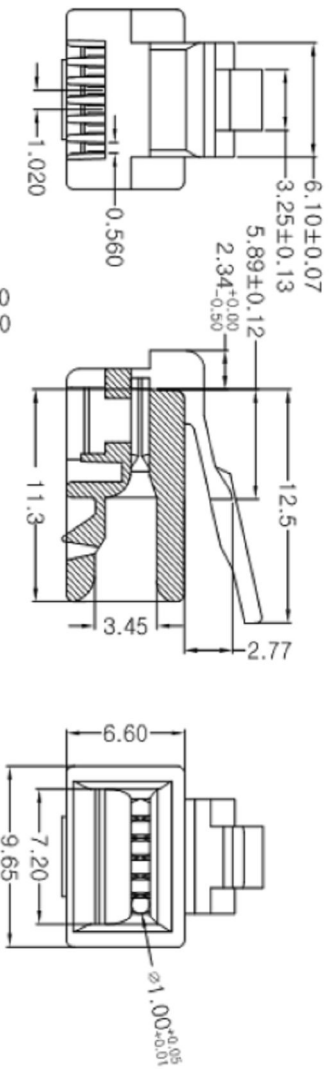
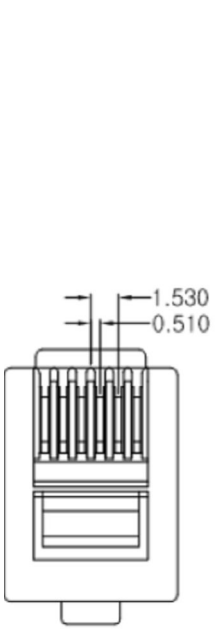
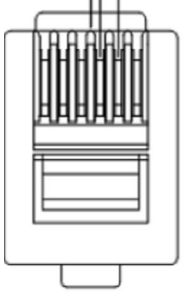



	1	2	3	4	5	6	7																												
A	<p>Specifications:</p> <p>Material: Housing: Poly Carbonate(PC) UL94V-2 E919153 Contact blade: High strength copper alloy 100 micron Nickel underplated Plating type: 8% Phosphor Bronze Plating thickness: 50u" gold plated Operating temperature: -40°C to +125°C</p> <p>Electrical: Current rating: 250V AC max. at 2A Dielectric: 500V AC Insulation resistance: 500MΩ Termination resistance: 35mΩ Max after environmental tests</p> <p>Mechanical: Tensile Strength: 20LBS(89N) Min. Durability: 500 Mating Cycle</p> <p>Complies with FCC68/F</p>							A																											
B								B																											
C								C																											
D								D																											
E								E																											
F								F																											
G	<p style="text-align: center;">RoHS compliant Unit: mm</p> <table border="1"> <thead> <tr> <th>Scale</th> <th>Free TOLERANCE</th> </tr> </thead> <tbody> <tr> <td>X.X</td> <td>±0.20</td> </tr> <tr> <td>X.XX</td> <td>±0.10</td> </tr> <tr> <td>X.XXX</td> <td>±0.05</td> </tr> <tr> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>Angle</td> <td>±2°</td> </tr> <tr> <td>Angle</td> <td>TOL</td> </tr> </tbody> </table>							Scale	Free TOLERANCE	X.X	±0.20	X.XX	±0.10	X.XXX	±0.05	DIM	TOL	Angle	±2°	Angle	TOL	G													
Scale	Free TOLERANCE																																		
X.X	±0.20																																		
X.XX	±0.10																																		
X.XXX	±0.05																																		
DIM	TOL																																		
Angle	±2°																																		
Angle	TOL																																		
H	<table border="1"> <thead> <tr> <th>①</th> <th>Drawn</th> <th>Date</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td></td> <td>Winnie</td> <td>13.06.2016</td> <td>Winnie</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Date</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td>13.06.2016</td> <td>Winnie</td> </tr> <tr> <td>13.06.2016</td> <td>Winnie</td> </tr> </tbody> </table> <table border="1"> <tr> <td rowspan="2" style="text-align: center;">ASSMANN components</td> <td>Customer-No.</td> <td>ASSMANN WSW-No.</td> <td rowspan="2">Drawing-No.</td> <td rowspan="2">A-MO 6/6-F50</td> </tr> <tr> <td>Replace</td> <td>ASS 7274 CO</td> <td>rev00</td> </tr> <tr> <td colspan="2"></td> <td>Sheet</td> <td colspan="2"></td> </tr> </table>							①	Drawn	Date	Name		Winnie	13.06.2016	Winnie	Date	Name	13.06.2016	Winnie	13.06.2016	Winnie	ASSMANN components	Customer-No.	ASSMANN WSW-No.	Drawing-No.	A-MO 6/6-F50	Replace	ASS 7274 CO	rev00			Sheet			H
①	Drawn	Date	Name																																
	Winnie	13.06.2016	Winnie																																
Date	Name																																		
13.06.2016	Winnie																																		
13.06.2016	Winnie																																		
ASSMANN components	Customer-No.	ASSMANN WSW-No.	Drawing-No.	A-MO 6/6-F50																															
	Replace	ASS 7274 CO			rev00																														
		Sheet																																	
	1	2	3	4	5	6	7																												