


MODEL:

SRXFANROOF

Roof-Mounted Fan Panel with 6 Fans

- A** 6 High-Performance 208-240V AC Fans
- B** Toolless Mounting (Hardware Included)
- C** Built-In Access Holes for Cable Routing
- D** C14 Power Inlet Dongle (Power Cord Not Included)

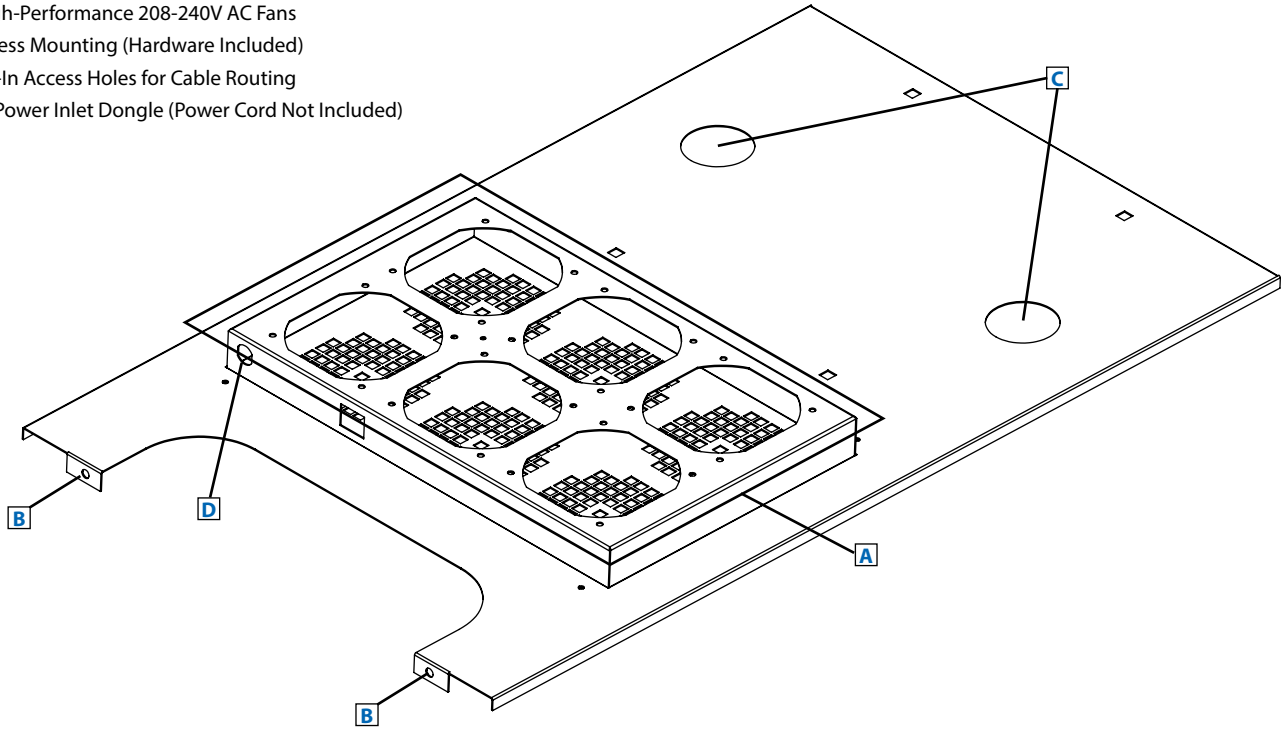

- Ideal for increasing ventilation in SmartRack® Enclosures
- For use in regions that support 208-240V mains power
- Compatible enclosures: SR25UB, SR25UBKD, SR25UBSP1, SR25UBTAA, SR42UB, SR42UBCL, SR42UBEXP, SR42UBG, SR42UBKD, SR42UBSP1, SR42UBTAA, SR48UB, SR48UBCL, SR48UBEXP, SR48UBSP1, SR42UBTAA and all others that specify the use of this accessory


SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS

Specifications


Model	SRXFANROOF
Fan Type	208-240V AC High-Performance (x6)
Volume Flow Rate	420 cfm
Unit Dimensions (H x W x D)	2.2 x 21.85 x 35.43 in. (55.8 x 555 x 899.8 mm)
Shipping Dimensions (H x W x D)	3.1 x 23.3 x 37 in. (78.74 x 591.82 x 939.8 mm)
Unit Weight	22 lb. (9.98 kg)
Shipping Weight	25 lb. (11.34 kg)




1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

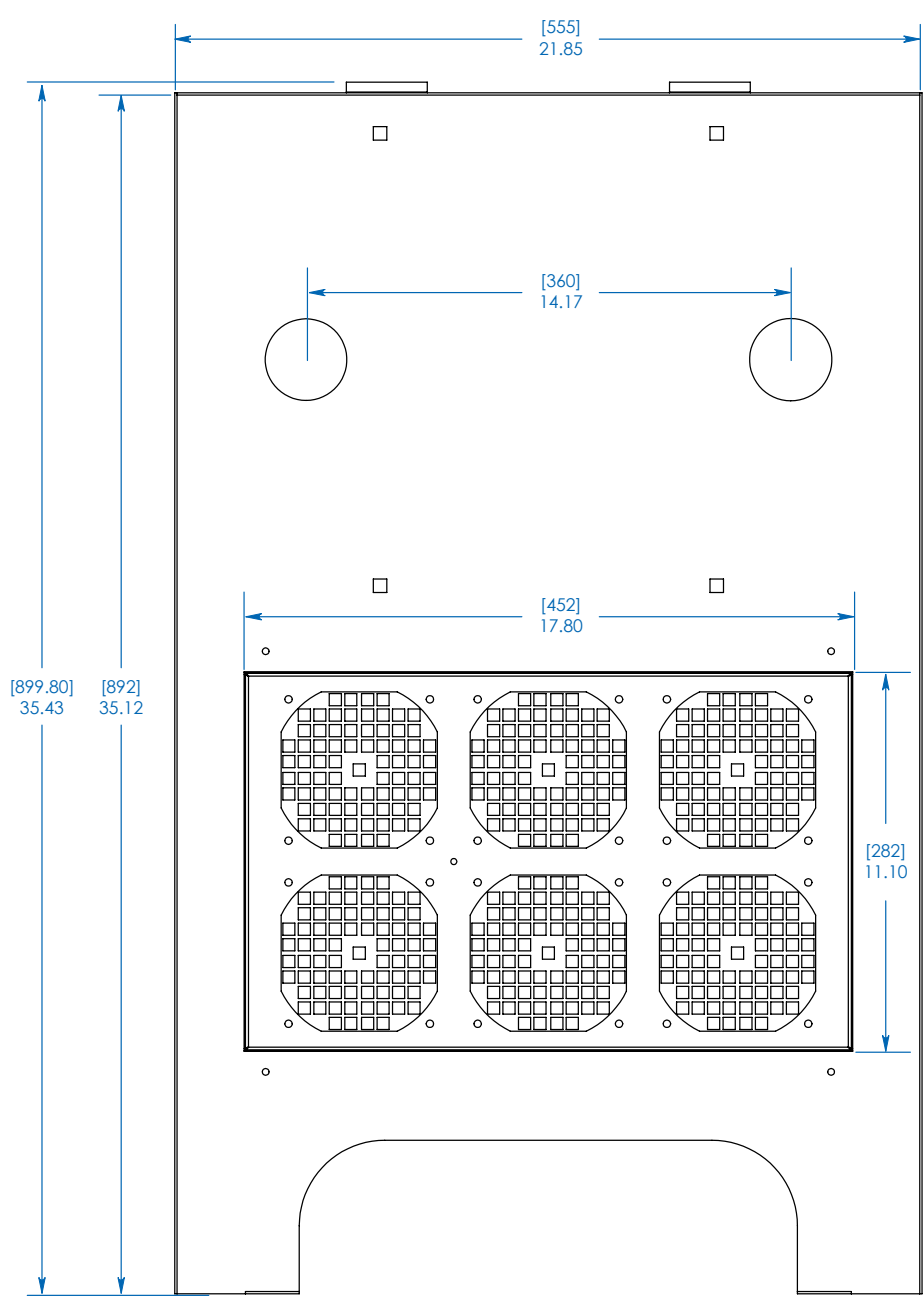


TOP VIEW

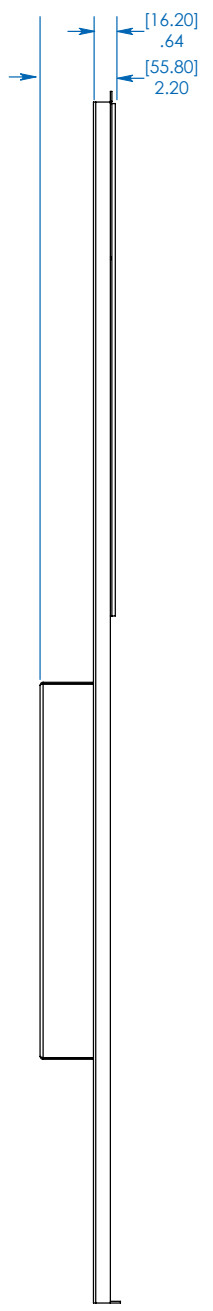

SIDE VIEW

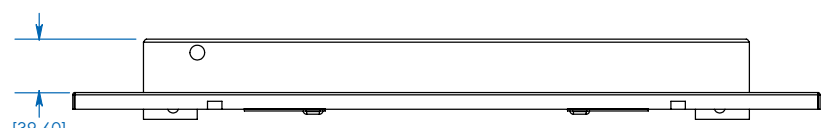

BACK VIEW

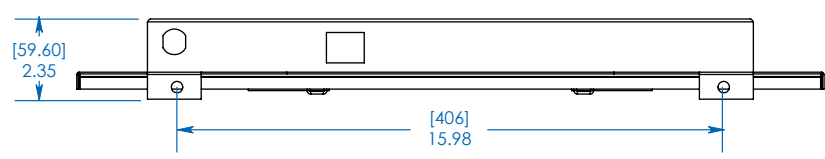

FRONT VIEW

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
SRXFANROOF
TRIPP-LITE

1111 W. 35th Street
 Chicago, IL 60609 USA
 773.869.1234
 www.tripplite.com