

6

5

4

3


2

1

P/N	LENGTH
79516-1101	1000 +/-50MM
79516-1103	3000 +/-100MM
79516-1105	5000 +/-150MM

EXT. "A"

EXT. "B"

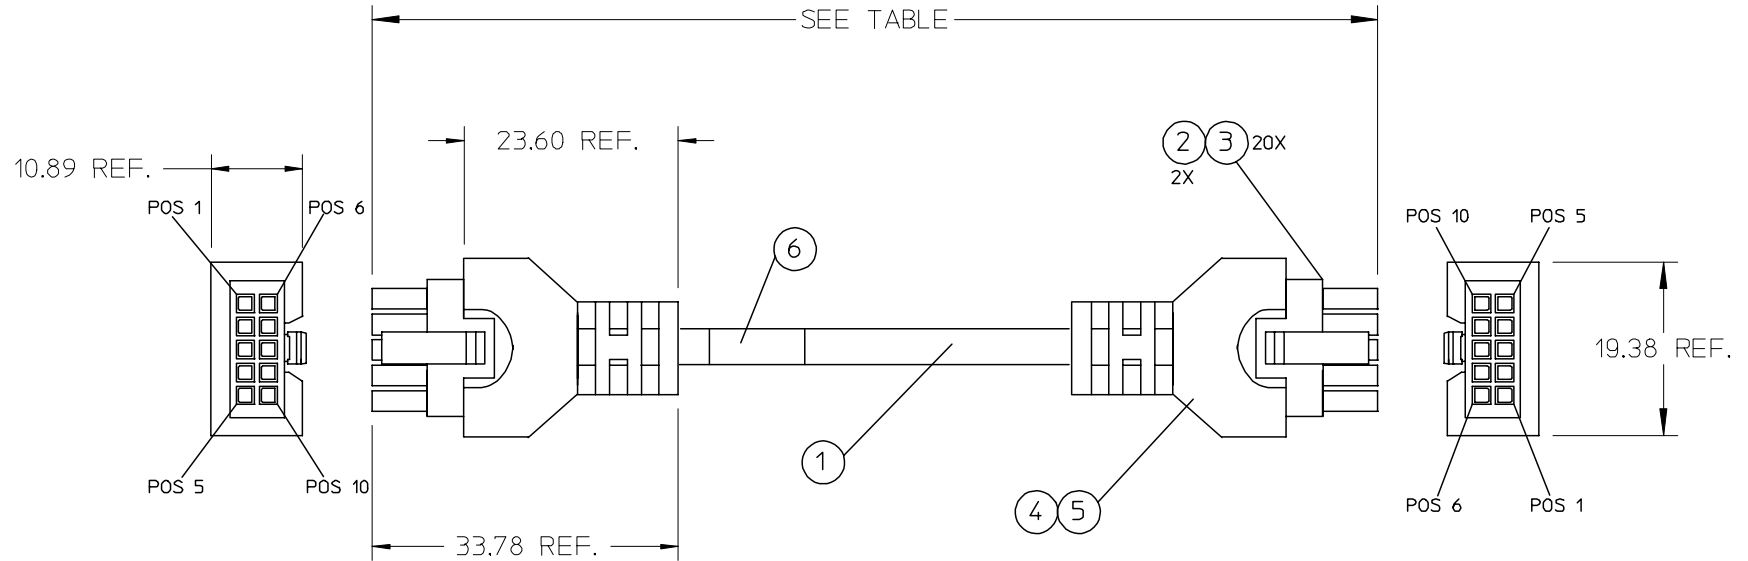

WIRING CHART

EXT. "A" POS.	COLOR	EXT. "B" POS.
1	BLACK	1
2	WHITE	2
3	RED	3
4	GREEN	4
5	BROWN	5
6	BLUE	6
7	ORANGE	7
8	YELLOW	8
9	VIOLET	9
10	GRAY	10

NOTES:

- PIN CONNECTION ACCORDING TO TABLE.
- LABEL CABLE WITH FOLLOWING INFORMATION:
P/N (SEE TABLE)
REV. (SEE REVISION TABLE)
M/D WW/YY
ASSEMBLED IN MEXICO

6	0799426019	PLASTIC LABEL EPC#R-TW10F	1 PC
5	0799300010	TAPON PARA CONECTOR MICROFIT MOLD	2 PC
4	0899920428	PVC 15% MF BLACK UL94V-2	A/R
3	0430300004	MicroFit 3.0 F Crp Term Chn Tin 26-30	20 PC
2	0430251000	MicroFit 3.0 DR Rcpt PnlMnt 2Ckt	2 PC
1	799232213	CABLE 10 COND. 26AWG, JACKETED	A/R
ITEM	P/N	DESCRIPTION	QTY

RELEASED EC NO: MEX2006-0156 DRWN:AOROZCO 2006/03/31 CHKD:ACUEVAS 2006/03/31 APPR:ACUEVAS 2006/04/03	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY AOROZCO	DATE 10/10/2003	TITLE MICRO-FIT OVERMOLDED ASSEMBLY 10 CKT 1, 3 & 5 MTS.		
		4 PLACES	± ---	± ---	CHECKED BY AOROZCO	DATE 10/10/2003	MOLEX INCORPORATED		
		3 PLACES	± ---	± ---	APPROVED BY ACUEVAS	DATE 10/10/2003	DOCUMENT NO. SD-79516-004		
			2 PLACES	± ---	± ---	MATERIAL NO. VARIOS		SHEET NO. 1 OF 1	
			1 PLACE	± ---	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
			ANGULAR ± ---°		SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		